


# AMICO Vinyl Accessories (Drywall) – Submittal Sheet (SHEET 1)

Project: \_\_\_\_\_  
 Location: \_\_\_\_\_ Contractor: \_\_\_\_\_  
 Distributor: \_\_\_\_\_ Date: \_\_\_\_\_


Please indicate which of the following will be used in this project:

## Drywall Corner Bead



AMCB-125 (1 1/4" x 1 1/4")  
 Length:  10-ft  8-ft

## Drywall Arch Bull Nose Corner Bead




AMBNCB-Arch (3/4" x 3/4")  
 Length:  10-ft  8-ft

## Drywall Arched Corner Bead




AMCB-125A (1 1/4" x 1 1/4")  
 Length:  10-ft  8-ft

## Drywall 120° Bull Nose Corner Bead




AMBNWA (3/4" x 3/4")  
 Length:  10-ft  8-ft

## Drywall 120° Wide Angle Corner Bead




AMCB-125WA (1 1/4" x 1 1/4")  
 Length:  10-ft  8-ft

## Drywall Bull Nose Inside Corner Bead

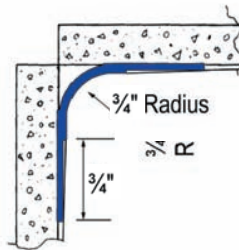

AMBNIC (3/4" x 3/4")  
 Length:  10-ft  8-ft

## Drywall Bull Nose Corner Bead

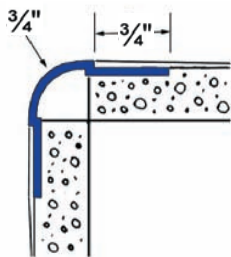

AMBNCB-750 (3/4" x 3/4")  
 Length:  10-ft  8-ft



### Alabama Metal Industries Corporation

3245 Fayette Ave. • P.O. Box 3928 • Birmingham, AL 35208  
 (205) 787-2611 • (800) 366-2642 • FAX (205) 786-6527  
[www.amico-vinyl.com](http://www.amico-vinyl.com)

All accessories are produced in 10-foot lengths, unless otherwise noted.


AMICO vinyl trims for exterior products conform to ASTM-C840, C844, C1047 and D1784. Vinyl trims for exterior products conform to ASTM-D4216 and C1063.

Beads can be cut with hand snips or fine tooth saw. All butt joints, intersections and ends should be joined, embedded and sealed in a quality sealant compatible with exterior paint/coating.

Project: \_\_\_\_\_  
 Location: \_\_\_\_\_ Contractor: \_\_\_\_\_  
 Distributor: \_\_\_\_\_ Date: \_\_\_\_\_

Please indicate which of the following will be used in this project:


## Drywall Bull Nose Casing "J" Bead



- AMBNC-100 (1 3/4" overall width / 1" perforated flange)


## Drywall Zip Strip "L" Bead

(1 1/16" perforated flange / 5/16" removable leg)




- AMZIP-50 (1/2" board thickness)
- AMZIP-58 (5/8" board thickness)

## Drywall "J" Bead (7/8" back leg / 1/2" return)

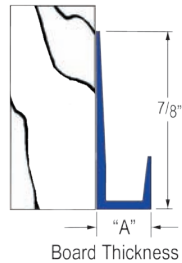

- AMJB-25 (1/4" board thickness)
- AMJB-38 (3/8" board thickness)
- AMJB-50 (1/2" board thickness)
- AMJB-58 (5/8" board thickness)


## Drywall "L" Bead (1 1/16" width)



- AMSB-50 (1/2" board thickness)
- AMSB-58 (5/8" board thickness)


## Drywall Shadow Line "J" Bead

(7/8" back leg / 1/2" return)

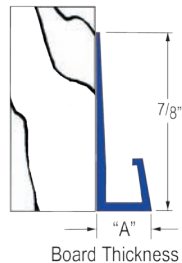

- AMSJB-25 (1/4" board thickness)
- AMSJB-38 (3/8" board thickness)
- AMSJB-50 (1/2" board thickness)

## Drywall "MJ" Bead (1 1/16" width / 1/4" return)



- AMMJB-50 (1/2" board thickness)
- AMMJB-58 (5/8" board thickness)



### Alabama Metal Industries Corporation

3245 Fayette Ave. • P.O. Box 3928 • Birmingham, AL 35208  
 (205) 787-2611 • (800) 366-2642 • FAX (205) 786-6527  
[www.amico-vinyl.com](http://www.amico-vinyl.com)

All accessories are produced in 10-foot lengths, unless otherwise noted.


AMICO vinyl trims for exterior products conform to ASTM-C840, C844, C1047 and D1784. Vinyl trims for exterior products conform to ASTM-D4216 and C1063.

Beads can be cut with hand snips or fine tooth saw. All butt joints, intersections and ends should be joined, embedded and sealed in a quality sealant compatible with exterior paint/coating.

Project: \_\_\_\_\_  
 Location: \_\_\_\_\_ Contractor: \_\_\_\_\_  
 Distributor: \_\_\_\_\_ Date: \_\_\_\_\_


Please indicate which of the following will be used in this project:

## Drywall Control Joint Deep "V"

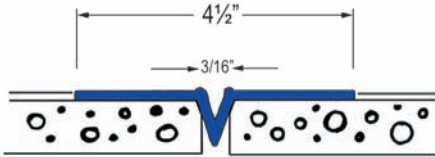


AMDCJV-16 (2 1/4" perforated flange / 3/16" reveal)

## Drywall Vinyl Reveals

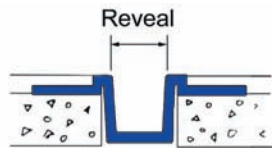


- AMDWR-500 (1/2" reveal)
- AMDWR-750 (3/4" reveal)
- AMDWR-1000 (1" reveal)

## Drywall Vinyl "F" Channel Reveals

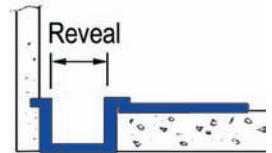


- AMDFR-500 (1/2" reveal)
- AMDFR-750 (3/4" reveal)
- AMDFR-1000 (1" reveal)

## Drywall Soffit Vent Inserts

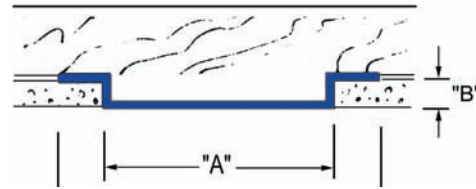

	Vent Width	Open Area per lineal ft.	Board Thickness
<input type="checkbox"/> AMSVI-100	1"	4.6 sq. in.	3/8"
<input type="checkbox"/> AMSVI-200	2"	9.2 sq. in.	3/8"
<input type="checkbox"/> AMSVI-300	3"	14.0 sq. in.	3/8"
<input type="checkbox"/> AMSVI-400	4"	18.6 sq. in.	3/8"

## Drywall Soffit Vent for Sheathing

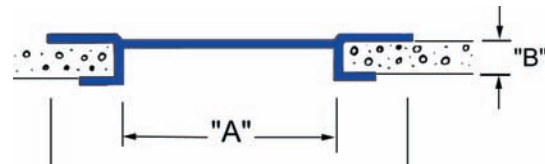

	Vent Width	Open Area per lineal ft.	Board Thickness
<input type="checkbox"/> AMSV-300-500	3"	14.0 sq. in.	1/2"
<input type="checkbox"/> AMSV-300-580	3"	14.0 sq. in.	5/8"



### Alabama Metal Industries Corporation

3245 Fayette Ave. • P.O. Box 3928 • Birmingham, AL 35208  
 (205) 787-2611 • (800) 366-2642 • FAX (205) 786-6527  
[www.amico-vinyl.com](http://www.amico-vinyl.com)

All accessories are produced in 10-foot lengths, unless otherwise noted.

AMICO vinyl trims for exterior products conform to ASTM-C840, C844, C1047 and D1784. Vinyl trims for exterior products conform to ASTM-D4216 and C1063.

Beads can be cut with hand snips or fine tooth saw. All butt joints, intersections and ends should be joined, embedded and sealed in a quality sealant compatible with exterior paint/coating.