
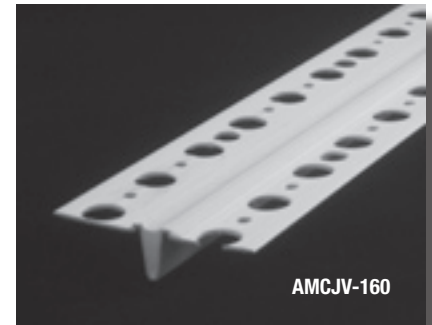


EIFS Expansion Joints (Deep "V") with removable tape are manufactured with a deep center "V" which allows for more movement than would normally be possible with one that matched the thickness of the finish coat. This bead requires that a space be left between sheets of foam or routed into the foam board to accommodate the deep center "V". All surfaces that receive finish have ridges for better adhesion.



Product No.	Width	Finish Thickness	Box Count
AMCJV-160	2 1/4"	1/16"	60
AMCJV-250	2 1/4"	1/4"	35

1/16" ground is typically used with EIFS soft coat systems.

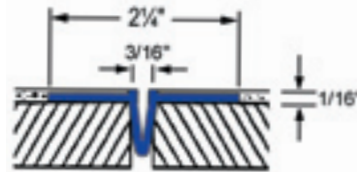

AMCJV-160


1/4" ground is typically used with some 1-coat stucco and hard coat EIFS systems. The part could also be used as an expansion joint for direct applied finish systems, sometimes called DEFS Systems.

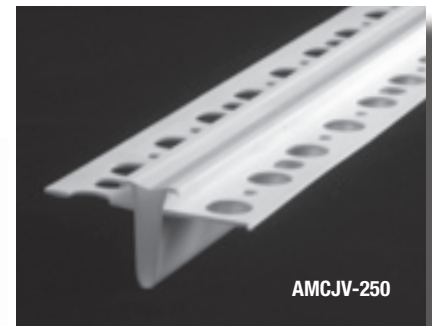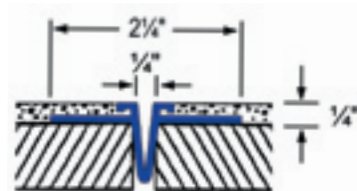

AMCJV-250

EIFS Soffit Vent is designed to accommodate 1" foam insulation board, while providing a full 3" of vented area. This provides 14 square inches of open area per lineal foot. All surfaces that receive finish have ridges for better adhesion. The top flanges are extra wide, and have a 1/8" ground to accommodate the application of the proper thickness of finish.

Product No.	Overall Width	Vent Opening	Board Thickness	Box Count
AMFBSVE-300-100	4 3/4"	3"	1"	12

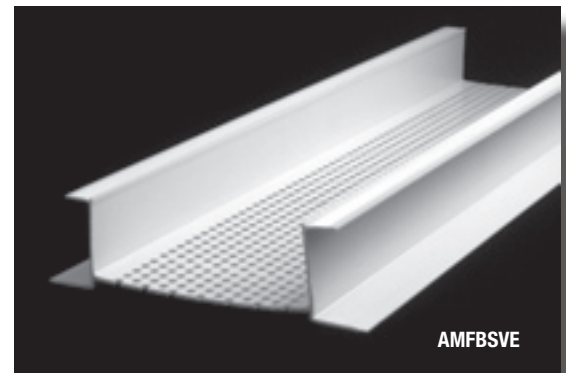

AMFBSVE

