


# STUCCO CASING BEADS

**Vinyl Angled Casing Bead** is used to form the top edge of a horizontal wall band. It is used when the applicator chooses not to use angled banding bead. The down sloping angle permits water to move away from the top edge of the wall and away from the building facade.


Vinyl Casing Bead with Deep Ground (Banding Bead) can be used on the lower edge, as illustrated at right.

Product No.	Dimensions	Ground	Box Count
AM66-Angled-500	1 3/4" Flange	1/2"	100
AM66-Angled-580	1 3/4" Flange	5/8"	100
AM66-Angled-750	1 3/4" Flange	3/4"	75
AM66-Angled-1000	1 3/4" Flange	1"	75
AM66-Angled-1250	1 3/4" Flange	1 1/4"	50
AM66-Angled-1500	1 3/4" Flange	1 1/2"	50
AM66-Angled-2000	1 3/4" Flange	2"	40

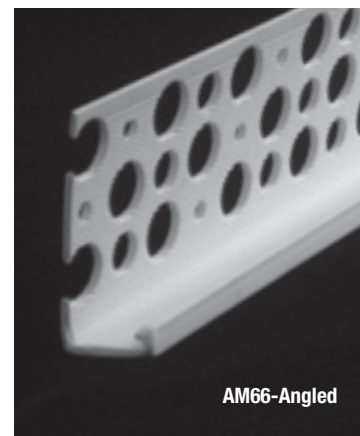

**Vinyl Solid Wide-Flange Casing Bead** is used as a stop with a solid flange. This product can be applied at window heads as well as at transitions from roof lines and foundation lines. It includes punches in bottom.

Product No.	Flange Height	Ground "A"	Box Count
AM66-WFWC-780	3 1/2"	7/8"	40
AM66-WFWC-500	3 1/2"	1/2"	40

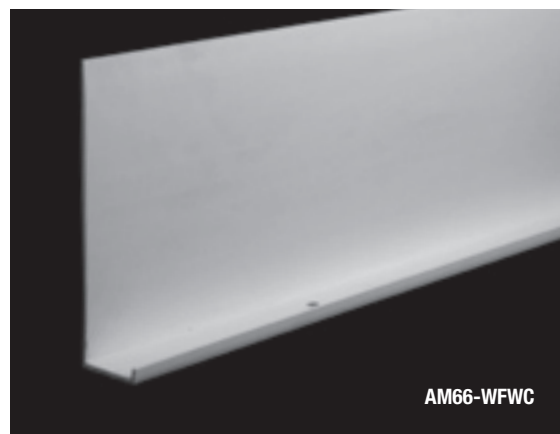

**Vinyl Extra-Long Flange Casing Bead** has the same design as our AM66 beads, except with a wider, perforated flange.

Product No.	Flange Height	Ground "A"	Box Count
AM66-XWF-580	5"	5/8"	40
AM66-XWF-750	5"	3/4"	40

