


# STUCCO CASING BEADS

**Vinyl Banding Bead** is used to form the sharp clean edges of horizontal bands. A double ground or screed lip has been provided to facilitate the screeding of the adjoining stucco. Different thicknesses of stucco are applied creating the band. Our double ground allows for a true, straight and clean band for stucco applications. (Patent #5,423,154)

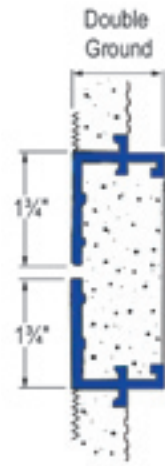

Product No.	Dimensions	Ground	Box Count	Band Thickness
AMBB-750-500	1 3/4" Flange	3/4" x 1/2"	50	3/4"
AMBB-1000-500	1 3/4" Flange	1" x 1/2"	50	1"
AMBB-1500-500	1 3/4" Flange	1 1/2" x 1/2"	30	1 1/2"
AMBB-1500-750	1 3/4" Flange	1 1/2" x 3/4"	30	1 1/2"



## Banding Bead in a Lap-Siding Application

Using the AMBB banding beads to create a "siding" effect on vertical walls provides a stucco finish usually not seen in traditional stucco locations.

Ground A	Ground B
3/4"	1/2"
1"	1/2"
1"	3/4"
1 1/2"	1/2"



**Vinyl Angled Banding Bead** is used to form the TOP EDGES of horizontal bands. This bead forms sharp and clean edges the same as our standard banding bead. The ANGLED TOP EDGE or surface allows water to drain away from the wall surface. A double ground or screed lip has been provided to facilitate the screeding of the adjoining stucco. Different thicknesses of stucco are applied creating the band. (Patent #5,423,154)

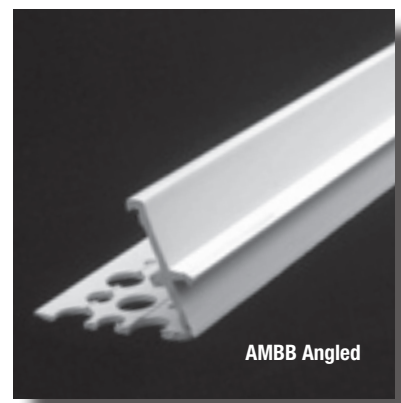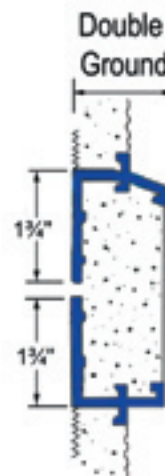

Product No.	Dimensions	Ground	Box Count	Band Thickness
AMBB-750-500 Angled	1 3/4" Flange	3/4" x 1/2"	50	3/4"
AMBB-1000-500 Angled	1 3/4" Flange	1" x 1/2"	50	1"
AMBB-1500-500 Angled	1 3/4" Flange	1 1/2" x 1/2"	30	1 1/2"
AMBB-1500-750 Angled	1 3/4" Flange	1 1/2" x 3/4"	30	1 1/2"