

Galvanized Steel Expanded Metal Lath

Project Submittals as manufactured by
ALABAMA METAL INDUSTRIES CORPORATION

Submittal Date:

Contract Number:

Project Name:

Section Number:

Name of Contractor:

LEED:

Credit 4.1 & 4.2 – Recycled Content

Credit 5.1 & 5.2 – Regional Materials (potentially available)

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION


3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

Al [i gh201%

email fmayer@gibraltar1.com



Flat Diamond Expanded Metal Lath 2.5 lbs / sqyd Galvanized Steel meeting ASTM C847

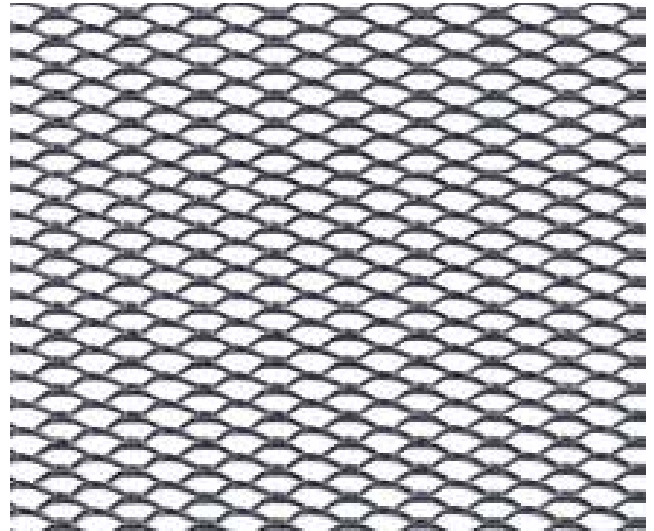

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal flat diamond lath without paper backing and designed to be used as a base for gypsum or portland cement plaster.

DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS Per ASTM C847

Minimum thickness of expanded metal lath

1. Diamond mesh expanded metal lath: $\frac{1}{8}$ inch

Nominal sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)

Nominal weights of lath (for U.S.) - lbs/yd²

Flat Diamond Expanded Metal Lath weighing 2.5 lbs/yd²

Permissible Variations - inches

1. Thickness: $\pm 1/64$ inch
2. Width: $\pm 3/16$ inch
3. Length: -0 +1 inch
4. Weight: $\pm 10\%$

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 steel sheet that is further processed forming the diamond shaped pattern.

PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided.

AMICO LATH AND STUCCO ACCESSORIES MEETS THE FOLLOWING SPECIFICATIONS

ASTM C847 - Standard Specification for Expanded Metal Lath

ASTM C1063 Standard Specification for Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster

ASTM A653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process

Meets Buy American Procurement Requirements.
Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION


3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

email fmayer@gibraltar1.com

August 2011



Flat Diamond Expanded Metal Lath 3.4 lbs / sqyd Galvanized Steel meeting ASTM C847

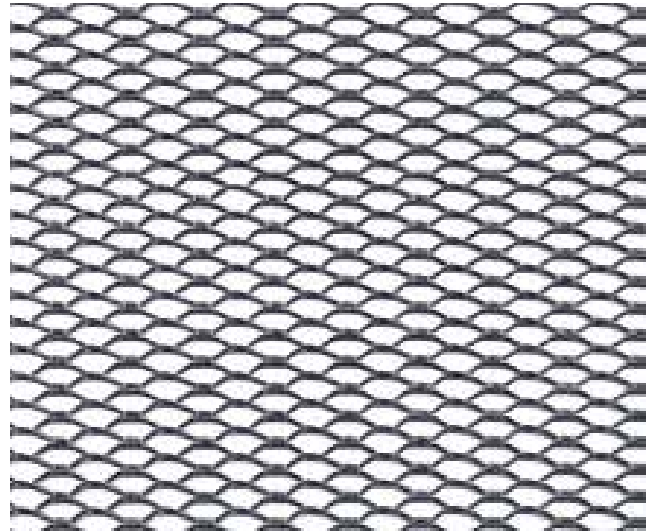

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal flat diamond lath without paper backing and designed to be used as a base for gypsum or portland cement plaster.

DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS Per ASTM C847

Minimum thickness of expanded metal lath

1. Diamond mesh expanded metal lath: $\frac{1}{8}$ inch

Nominal sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)

Nominal weights of lath (for U.S.) - lbs/yd²

Flat Diamond Expanded Metal Lath weighing 3.4 lbs/yd²

Permissible Variations - inches

1. Thickness: $\pm 1/64$ inch
2. Width: $\pm 3/16$ inch
3. Length: -0 +1 inch
4. Weight: $\pm 10\%$

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 steel sheet that is further processed forming the diamond shaped pattern.

PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided.

AMICO LATH AND STUCCO ACCESSORIES MEETS THE FOLLOWING SPECIFICATIONS

ASTM C847 - Standard Specification for Expanded Metal Lath

ASTM C1063 Standard Specification for Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster

ASTM A653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process

Meets Buy American Procurement Requirements.
Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION


3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

email fmayer@gibraltar1.com

August 2011



Flat Diamond Expanded Metal Lath 1.75 lbs / sqyd Galvanized Steel without paper backing

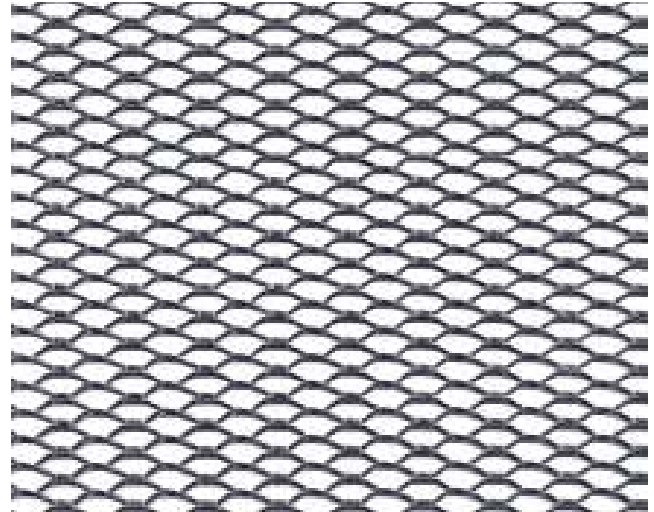

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal flat diamond lath without paper backing and designed to be used as a base for gypsum or portland cement plaster.

DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS AS PRODUCED BY AMICO.

1.75 LB./SY LATH IS NOT DEFINED IN ASTM C847

Minimum thickness of expanded metal lath

1. Diamond mesh expanded metal lath: $\frac{1}{8}$ inch

Minimum sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)

Nominal weights of lath (for U.S.) - lbs/yd² Flat Diamond Expanded Metal Lath weighing 1.75 lbs/yd²

Permissible Variations - inches

1. Thickness: $\pm 1/64$ inch
2. Width: $\pm 3/16$ inch
3. Length: -0 +1 inch
4. Weight: $\pm 10\%$

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 steel sheet that is further processed forming the diamond shaped pattern.

PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided.

AMICO LATH AND STUCCO ACCESSORIES MEETS THE FOLLOWING SPECIFICATIONS

ASTM C847 - Standard Specification for Expanded Metal Lath (TOLERANCES ONLY)

ASTM C1063 Standard Specification for Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster

ASTM A653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process

Meets Buy American Procurement Requirements.
Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

August 2011

email fmayer@gibraltar1.com



Dimpled Self-Furred Expanded Metal Lath

1.75 lbs / sqyd

without paper backing meeting ASTM C847.

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal dimple style self-furred diamond lath without paper backing and designed to be used as a base for gypsum or portland cement plaster.

Self-Furring Mechanism

1. Offset round dimples 4 inches on center

DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS AS PRODUCED BY AMICO.

1.75 LB./SY LATH IS NOT DEFINED IN ASTM C847

Minimum thickness of expanded metal lath

1. Diamond mesh expanded metal lath: $\frac{1}{8}$ inch

Minimum sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)

Nominal weights of lath (for U.S.) - lbs/yd² Self-Furred
Dimpled Expanded Metal Lath weighing 1.75 lbs/yd²

Permissible Variations - inches

1. Thickness: $\pm 1/64$ inch
2. Width: $\pm 3/16$ inch
3. Length: -0 +1 inch
4. Weight: $\pm 10\%$

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 finish steel sheet that is further processed forming the diamond shaped pattern.



PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided.

AMICO LATH AND STUCCO ACCESSORIES MEETS THE FOLLOWING SPECIFICATIONS

ASTM C847 - Standard Specification for Expanded Metal Lath (For Tolerances Only)

ASTM C1063 Standard Specification for Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster.

ASTM A653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process

Meets Buy American Procurement Requirements.
Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

August 2011

email fmayer@gibraltar1.com



V-Groove Self-Furred Expanded Metal Lath

1.75 lbs / sqyd
without paper backing

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal V-groove style diamond lath without paper backing and designed to be used as a base for gypsum or portland cement plaster.

Self-Furring Mechanism

1. V-Grooves are embossed and spaced 6" on center the full length of the sheet of lath.

DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS AS PRODUCED BY AMICO.

1.75 LB./SY LATH IS NOT DEFINED IN ASTM C847

Minimum thickness of expanded metal lath

1. Diamond expanded metal lath: $\frac{1}{8}$ inch

Minimum sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)

Nominal weights of lath (for U.S.) - lbs/yd²


V-Grooved Self-Furred Expanded Metal Lath weighing 1.75 lbs/yd²

Permissible Variations - inches

1. Thickness: $\pm 1/64$ inch
2. Width: $\pm 3/16$ inch
3. Length: -0 +1 inch
4. Weight: $\pm 10\%$

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 finish steel sheet that is further processed forming the diamond shaped pattern.

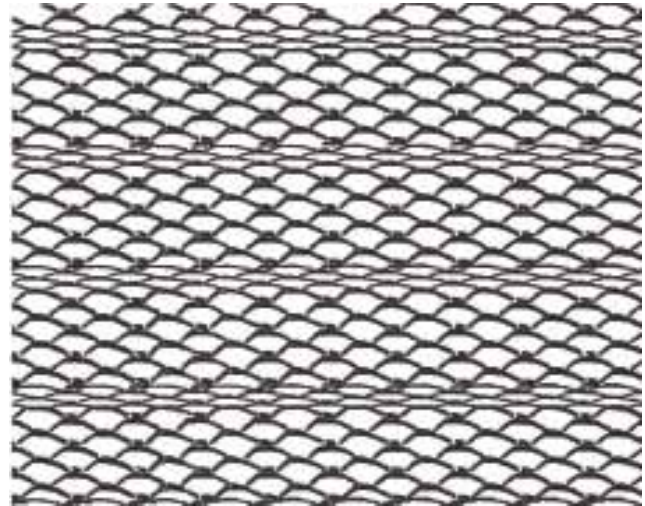

PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided.

AMICO LATH AND STUCCO ACCESSORIES MEETS THE FOLLOWING SPECIFICATIONS

ASTM C847 - Standard Specification for Expanded Metal Lath (For Tolerances Only)

ASTM A653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process

Meets Buy American Procurement Requirements.
Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

August 2011

email fmayer@gibraltar1.com



TILATH FLAT EXPANDED METAL 1.75 lbs / sq yd LATH WITH GRADE D, STYLE 2, FACTORY APPLIED ASPHALT SATURATED PAPER

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal diamond lath with paper backing and designed to be used as a base for gypsum or portland cement plaster.

DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS AS PRODUCED BY AMICO.

1.75 LB./SY LATH IS NOT DEFINED IN ASTM C847

Minimum thickness of expanded metal lath

1. Diamond expanded metal lath: $\frac{1}{8}$ inch

Minimum sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)

Nominal weights of lath (for U.S.) - lbs/yd²

Tilath Flat Expanded Metal Lath weighing 1.75 lbs/yd²

The weights listed above are only for the metal lath and do not take into consideration the weight of the moisture barrier paper backing if so specified. The weight of the paper adds to the overall weight of the sheet of lath.sheet.

Permissible Variations - inches

1. Thickness: $\pm 1/64$ inch
2. Width: $\pm 3/16$ inch
3. Length: -0 +1 inch
4. Weight: $\pm 10\%$

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 finish steel sheet that is further processed forming the diamond shaped pattern.



PAPER BACKING FOR LATH

The Grade D paper backing factory applied by the manufacturer provides one of the layers of moisture barrier required by codes and standards. AMICO paper meets ASTM C1063 and Federal Specification UU-B-790a.

PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided. AMICO LATH AND STUCCO ACCESSORIES MEETS THE FOLLOWING SPECIFICATIONS

ASTM C847 - Standard Specification for Expanded Metal Lath

ASTMA653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process

Federal Specification UU-B-790a - Moisture Resistant Building Papers, Type 1, Grade 2, Style 2

Meets Buy American Procurement Requirements.

Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

August 2011

email fmayer@gibraltar1.com



TILATH PAPER BACKED DIMPLED SELF-FURRED LATH 1.75 lbs / sqyd WITH GRADE D, STYLE 2, ASPHALT SATURATED PAPER IS FACTORY APPLIED

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal diamond lath and self-furred lath, with or without paper backing and designed to be used as a base for gypsum or portland cement plaster.

DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS AS PRODUCED BY AMICO.

1.75 LB./SY LATH IS NOT DEFINED IN ASTM C847

Self-Furring Mechanism

1. Offset round dimples 4 inches on center

Minimum thickness of expanded metal lath

2. Self-furred expanded metal lath: $\frac{5}{16}$ inch

Minimum sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)

Nominal weights of lath (for U.S.) - lbs/yd²

Tilath Paper Backed and Dimpled Expanded Metal Lath weighing 1.75 lbs/yd²


The weights listed above are only for the metal lath and do not take into consideration the weight of the moisture barrier paper backing if so specified. The weight of the paper adds to the overall weight of the sheet of lath.

Permissible Variations - inches

1. Thickness: $\pm 1/64$ inch
2. Width: $\pm 3/16$ inch
3. Length: -0 +1 inch
4. Weight: $\pm 10\%$

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 finish steel sheet that is further processed forming the diamond shaped pattern.

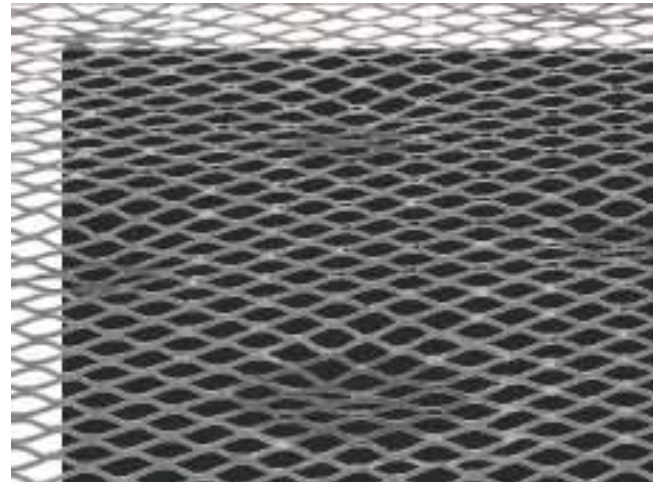

PAPER BACKING FOR LATH

The Grade D paper backing factory applied by the manufacturer provides one of the layers of moisture barrier required by codes and standards. AMICO paper meets ASTM C1063 and Federal Specification UU-B-790a.

PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided.
AMICO LATH AND STUCCO ACCESSORIES MEETS THE FOLLOWING SPECIFICATIONS
ASTM C847 - Standard Specification for Expanded Metal Lath
ASTM A653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process
Federal Specification UU-B-790a - Moisture Resistant Building Papers, Type 1, Grade 2, Style 2
Meets Buy American Procurement Requirements.
Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

August 2011

email fmayer@gibraltar1.com



Dimpled Self-Furred Expanded Metal Lath

2.5 lbs / sqyd

without paper backing meeting ASTM C847.

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal dimple style self-furred diamond lath without paper backing and designed to be used as a base for gypsum or portland cement plaster.

DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS Per ASTM C847

Self-Furring Mechanism

1. Offset round dimples 4 inches on center

Minimum thickness of expanded metal lath

1. Diamond mesh expanded metal lath: $\frac{1}{8}$ inch

Minimum sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)

Nominal weights of lath (for U.S.) - lbs/yd² Dimpled Self-Furred Expanded Metal Lath weighing 2.5 lbs/yd²

Permissible Variations - inches

1. Thickness: $\pm 1/64$ inch
2. Width: $\pm 3/16$ inch
3. Length: -0 +1 inch
4. Weight: $\pm 10\%$

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 finish steel sheet that is further processed forming the diamond shaped pattern.



PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided.

AMICO LATH AND STUCCO ACCESSORIES MEETS THE FOLLOWING SPECIFICATIONS

ASTM C847 - Standard Specification for Expanded Metal Lath

ASTM A653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process

Meets Buy American Procurement Requirements.
Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

email fmayer@gibraltar1.com

August 2011



Dimpled Self-Furred Expanded Metal Lath 3.4 lbs / sqyd

without paper backing meeting ASTM C847.

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal dimple style self-furred diamond lath without paper backing and designed to be used as a base for gypsum or portland cement plaster.

DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS Per ASTM C847

Self-Furring Mechanism

1. Offset round dimples 4 inches on center

Minimum thickness of expanded metal lath

1. Diamond mesh expanded metal lath: $\frac{1}{8}$ inch

Minimum sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)

Nominal weights of lath (for U.S.) - lbs/yd²
Dimpled Self-Furred Expanded Metal Lath
weighing 3.4 lbs/yd²

Permissible Variations - inches

1. Thickness: $\pm 1/64$ inch
2. Width: $\pm 3/16$ inch
3. Length: -0 +1 inch
4. Weight: $\pm 10\%$

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 finish steel sheet that is further processed forming the diamond shaped pattern.



PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided.

AMICO LATH AND STUCCO ACCESSORIES MEETS THE FOLLOWING SPECIFICATIONS

ASTM C847 - Standard Specification for Expanded Metal Lath

ASTM A653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process

Meets Buy American Procurement Requirements.
Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

August 2011

email fmayer@gibraltar1.com



V-Groove Self-Furred Expanded Metal Lath

2.5 lbs / sqyd

without paper backing meeting ASTM C847.

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal V-groove style diamond lath without paper backing and designed to be used as a base for gypsum or portland cement plaster.

DIMENSIONS, WEIGHTS AND
PERMISSIBLE VARIATIONS Per ASTM C847

Self-Furring Mechanism

1. V-Grooves are embossed and spaced 6" on center the full length of the sheet of lath.

Minimum thickness of expanded metal lath

1. V-Grooved Self Furring metal lath: $\frac{1}{8}$ inch

Minimum sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)

Nominal weights of lath (for U.S.) - lbs/yd²


V-Grooved Self-Furred Expanded Metal Lath
weighing 2.5 lbs/yd²

Permissible Variations - inches

1. Thickness: $\pm 1/64$ inch
2. Width: $\pm 3/16$ inch
3. Length: -0 +1 inch
4. Weight: $\pm 10\%$

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 finish steel sheet that is further processed forming the diamond shaped pattern.

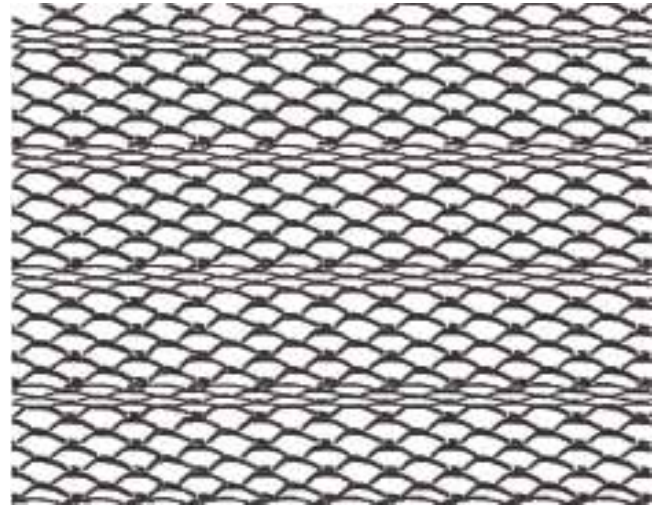

PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided.

AMICO LATH AND STUCCO ACCESSORIES MEETS THE FOLLOWING SPECIFICATIONS

ASTM C847 - Standard Specification for Expanded Metal Lath

ASTM A653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process

Meets Buy American Procurement Requirements.
Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

August 2011

email fmayer@gibraltar1.com



V-Groove Self-Furred Expanded Metal Lath

3.4 lbs / sqyd

without paper backing meeting ASTM C847.

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal V-groove style diamond lath without paper backing and designed to be used as a base for gypsum or portland cement plaster.

DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS Per ASTM C847

Self-Furring Mechanism

1. V-Grooves are embossed and spaced 6" on center the full length of the sheet of lath.

Minimum thickness of expanded metal lath

1. V-Grooved Self Furring metal lath: 1/8 inch

Minimum sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)

Nominal weights of lath (for U.S.) - lbs/yd²


V-Grooved Self-Furred Expanded Metal Lath weighing 3.4 lbs/yd²

Permissible Variations - inches

1. Thickness: ± 1/64 inch
2. Width: ± 3/16 inch
3. Length: -0 +1 inch
4. Weight: ± 10%

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 finish steel sheet that is further processed forming the diamond shaped pattern.

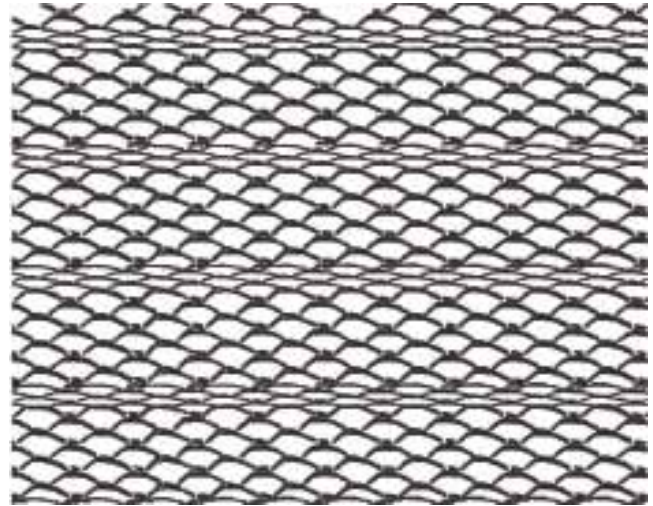

PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided.

AMICO LATH AND STUCCO ACCESSORIES MEETS THE FOLLOWING SPECIFICATIONS

ASTM C847 - Standard Specification for Expanded Metal Lath

ASTM A653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process

Meets Buy American Procurement Requirements.
Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

email fmayer@gibraltar1.com

August 2011



1/8" Rib Lath (Flat Rib) EXPANDED METAL LATH 2.75 lbs / sqyd without paper backing meeting ASTM C847.

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal 1/8" Rib Lath (flat rib), without paper backing and designed to be used as a base for gypsum or portland cement plaster.

DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS Per ASTM C847

Minimum thickness of expanded metal lath

1. Flat Rib expanded metal lath: 1/8 inch

Minimum sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)


Nominal weight of lath (for U.S.) - lbs/yd 1/8" Flat Rib Expanded Metal Lath weighing 2.5 lbs/yd²

Permissible Variations - inches

1. Thickness: ± 1/64 inch
2. Width: ± 3/16 inch
3. Length: -0 in. +1 inch
4. Weight: ± 10%

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 finish steel sheet that is further processed forming the diamond shaped pattern.

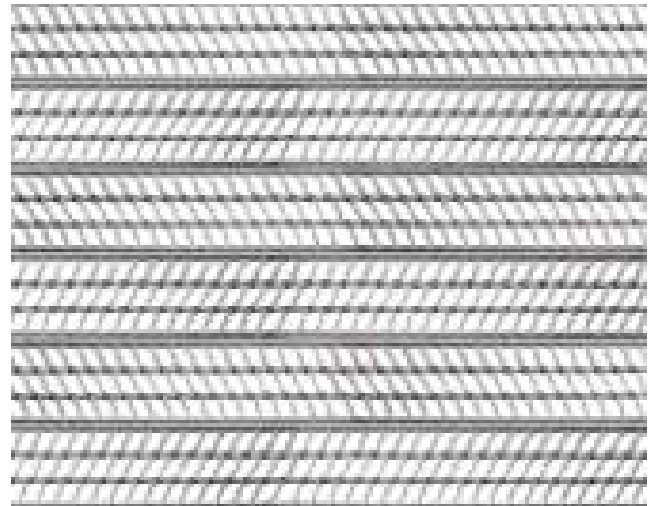

PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided.

AMICO LATH AND STUCCO ACCESSORIES MEETS THE FOLLOWING SPECIFICATIONS

ASTM C847 - Standard Specification for Expanded Metal Lath

ASTM A653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process

Meets Buy American Procurement Requirements.
Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

August 2011

email fmayer@gibraltar1.com



1/8" Rib Lath (Flat Rib) EXPANDED METAL LATH

3.4 lbs / sqyd

without paper backing meeting ASTM C847.

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal 1/8" Rib Lath (flat rib), without paper backing and designed to be used as a base for gypsum or portland cement plaster.

DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS Per ASTM C847

Minimum thickness of expanded metal lath

1. Flat Rib expanded metal lath: 1/8 inch

Minimum sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)


Nominal weight of lath (for U.S.) - lbs/yd 1/8" Flat Rib Expanded Metal Lath weighing 3.4 lbs/yd²

Permissible Variations - inches

1. Thickness: ± 1/64 inch
2. Width: ± 3/16 inch
3. Length: -0 +1 inch
4. Weight: ± 10%

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 finish steel sheet that is further processed forming the diamond shaped pattern.

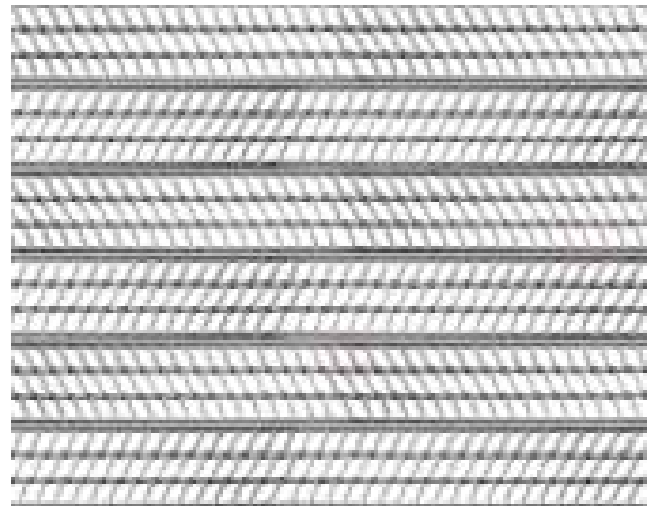

PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided.

AMICO LATH AND STUCCO ACCESSORIES MEETS THE FOLLOWING SPECIFICATIONS

ASTM C847 - Standard Specification for Expanded Metal Lath

ASTM A653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process

Meets Buy American Procurement Requirements.
Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

August 2011

email fmayer@gibraltar1.com



3/8" Rib Lath (High Rib) EXPANDED METAL LATH

4.0 lbs / sqyd

without paper backing meeting ASTM C847.

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal 3/8" Rib Lath (high rib) without paper backing and designed to be used as a base for gypsum or portland cement plaster.

DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS Per ASTM C847

Minimum thickness of expanded metal lath

1. High Rib expanded metal lath: $\frac{3}{8}$ inch

Minimum sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)

Nominal weight of lath (for U.S.) - lbs/yd²


$\frac{3}{8}$ " High Rib Expanded Metal Lath weighing 4.0 lbs/yd²

Permissible Variations - inches

1. Thickness: $\pm 1/64$ inch
2. Width: $\pm 3/16$ inch
3. Length: -0 +1 inch
4. Weight: $\pm 10\%$

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 finish steel sheet that is further processed forming the diamond shaped pattern.

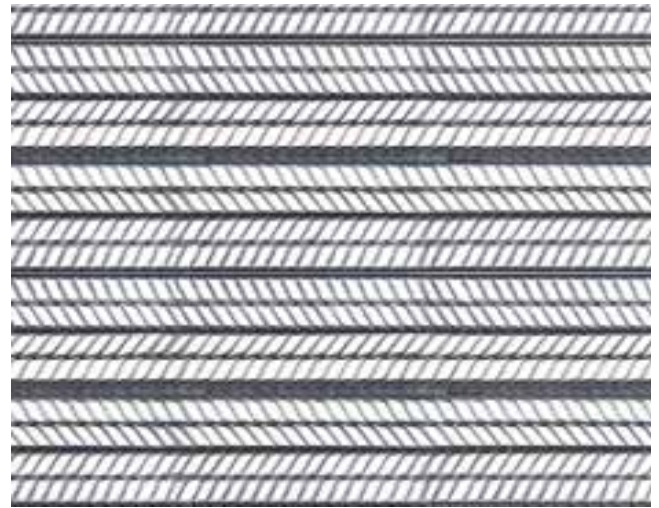

PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided.

AMICO LATH AND STUCCO ACCESSORIES MEETS THE FOLLOWING SPECIFICATIONS

ASTM C847 - Standard Specification for Expanded Metal Lath

ASTM A653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process

Meets Buy American Procurement Requirements.
Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

August 2011

email fmayer@gibraltar1.com



3/8" Rib Lath (High Rib) EXPANDED METAL LATH

3.4 lbs / sqyd

without paper backing meeting ASTM C847.

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal 3/8" Rib Lath (high rib) without paper backing and designed to be used as a base for gypsum or portland cement plaster.

DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS Per ASTM C847

Minimum thickness of expanded metal lath

1. High Rib expanded metal lath: 3/8 inch

Minimum sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)

Nominal weight of lath (for U.S.) - lbs/yd²


3/8" High Rib Expanded Metal Lath weighing 3.4 lbs/yd²

Permissible Variations - inches

1. Thickness: ± 1/64 inch
2. Width: ± 3/16 inch
3. Length: -0 in. +1 inch
4. Weight: ± 10%

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 finish steel sheet that is further processed forming the diamond shaped pattern.

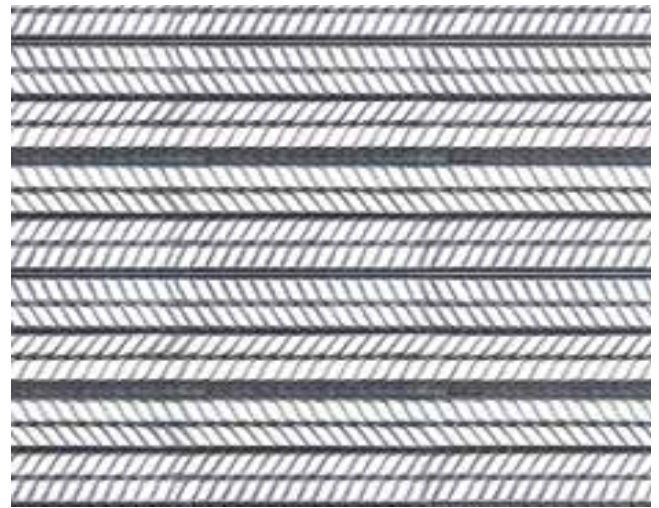

PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided.

AMICO LATH AND STUCCO ACCESSORIES MEETS THE FOLLOWING SPECIFICATIONS

ASTM C847 - Standard Specification for Expanded Metal Lath

ASTM A653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process

Meets Buy American Procurement Requirements.
Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

August 2011

email fmayer@gibraltar1.com



SPRAY LATH V-RIBBED EXPANDED METAL LATH 3.4 lbs / sqyd With Kraft Paper for Spray Applied Stucco

meeting ASTM C847

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal Spray Lath designed to be used as a base for gypsum or portland cement plaster.

DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS Per ASTM C847

Minimum thickness of expanded metal lath

1. Spray Lath V-Ribbed expanded metal lath: $\frac{3}{8}$ inch

Minimum sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)

Nominal weights of lath (for U.S.) - lbs/yd² Spray Lath
V-Ribbed Expanded Metal Lath weighing 3.4 lbs/yd²

The weights listed above are only for the metal lath and do not take into consideration the weight of the moisture barrier paper backing if so specified. The weight of the paper adds to the overall weight of the sheet of lath.

Permissible Variations - inches

1. Thickness: $\pm 1/64$ inch
2. Width: $\pm 3/16$ inch
3. Length: -0 +1 inch
4. Weight: $\pm 10\%$

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 finish steel sheet that is further processed forming the diamond shaped pattern.



PAPER BACKING FOR SPRAY LATH

The Kraft paper backing is factory applied between the V-Ribs to conserve the machine applied stucco and to allow visual location of the framing members.

PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided.

AMICO LATH AND STUCCO ACCESSORIES MEETS THE FOLLOWING SPECIFICATIONS

ASTM C847 - Standard Specification for Expanded Metal Lath

ASTM A653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process

Meets Buy American Procurement Requirements.
Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION


3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

email fmayer@gibraltar1.com

August 2011



SPRAY RIB LATH FLAT 1/8" RIB EXPANDED METAL LATH 2.75 lbs / sqyd With Kraft Paper for Spray Applied Stucco meeting ASTM C847

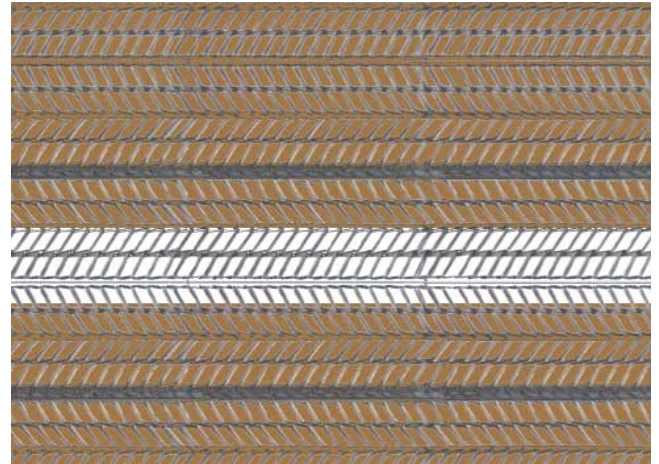

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal Spray Lath designed to be used as a base for gypsum or portland cement plaster.

DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS Per ASTM C847

Minimum thickness of expanded metal lath

1. Flat Rib expanded metal lath: 1/8 inch

Minimum sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)

Nominal weights of lath (for U.S.) - lbs/yd² Spray Lath
1/8" Flat Rib Expanded Metal Lath weighing 2.75 lbs/yd²

The weights listed above are only for the metal lath and do not take into consideration the weight of the moisture barrier paper backing if so specified. The weight of the paper adds to the overall weight of the sheet of lath.

Permissible Variations - inches

1. Thickness: ± 1/64 inch
2. Width: ± 3/16 inch
3. Length: -0 +1 inch
4. Weight: ± 10%

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 finish steel sheet that is further processed forming the diamond shaped pattern.

PAPER BACKING FOR SPRAY LATH

Two strips of Kraft paper 12" wide are factory attached to the lath to conserve the machine applied stucco and to allow visual location of the framing members.

PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided.

AMICO LATH AND STUCCO ACCESSORIES MEETS THE FOLLOWING SPECIFICATIONS

ASTM C847 - Standard Specification for Expanded Metal Lath

ASTM A653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process

Meets Buy American Procurement Requirements.
Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

August 2011

email fmayer@gibraltar1.com



SPRAY RIB LATH FLAT 1/8" RIB EXPANDED METAL LATH 3.4 lbs / sqyd With Kraft Paper for Spray Applied Stucco

meeting ASTM C847

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal Spray Lath designed to be used as a base for gypsum or portland cement plaster.

DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS Per ASTM C847

Minimum thickness of expanded metal lath

1. Fat Rib expanded metal lath: 1/8 inch

Minimum sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)

Nominal weights of lath (for U.S.) - lbs/yd² Spray Lath
1/8" Flat Rib Expanded Metal Lath weighing 3.4 lbs/yd²


The weights listed above are only for the metal lath and do not take into consideration the weight of the moisture barrier paper backing if so specified. The weight of the paper adds to the overall weight of the sheet of lath.

Permissible Variations - inches

1. Thickness: ± 1/64 inch
2. Width: ± 3/16 inch
3. Length: -0 +1 inch
4. Weight: ± 10%

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 finish steel sheet that is further processed forming the diamond shaped pattern.

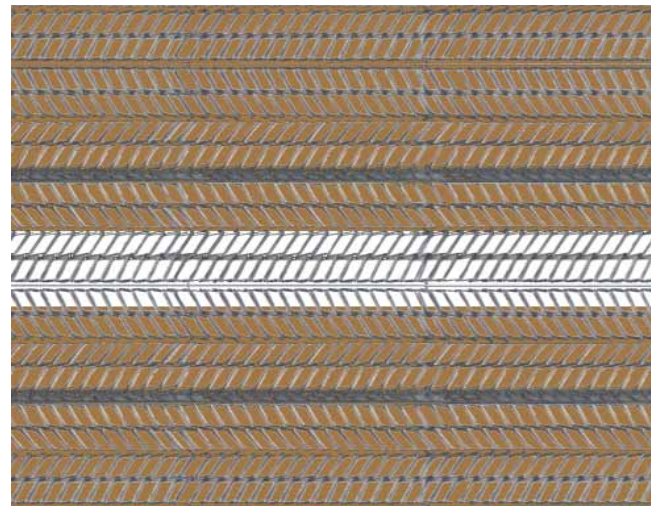

KRAFT PAPER BACKING FOR SPRAY LATH

Two strips of Kraft paper 12" wide are factory attached to the lath to conserve the machine applied stucco and to allow visual location of the framing members.

PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided.
AMICO LATH AND STUCCO ACCESSORIES
MEETS THE FOLLOWING SPECIFICATIONS

ASTM C847 - Standard Specification for Expanded Metal Lath

ASTM A653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process

Meets Buy American Procurement Requirements.
Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

August 2011


email fmayer@gibraltar1.com



SPRAY RIB LATH HIGH $\frac{3}{8}$ " RIB EXPANDED METAL LATH 3.4 lbs / sqyd With Kraft Paper for Spray Applied Stucco meeting ASTM C847

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal Spray Lath designed to be used as a base for gypsum or portland cement plaster.

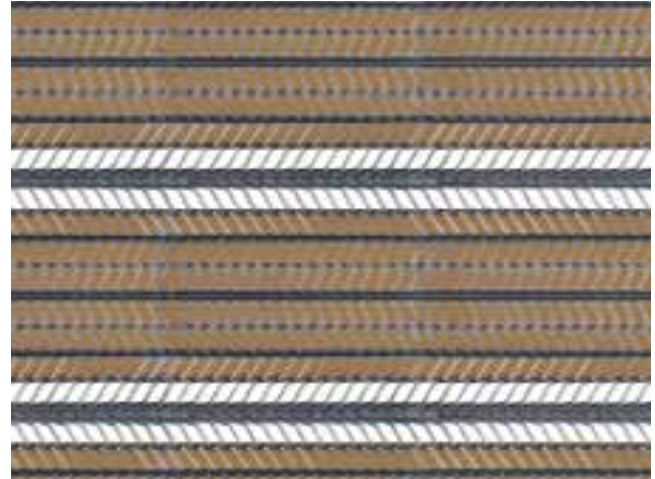

DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS Per ASTM C847

Minimum thickness of expanded metal lath

1. High rib expanded metal lath: $\frac{3}{8}$ inch

Minimum sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)

Nominal weights of lath (for U.S.) - lbs/yd² Spray Lath Expanded Metal $\frac{3}{8}$ " and Rib Lath weighing 3.4 lbs/yd²

The weights listed above are only for the metal lath and do not take into consideration the weight of the moisture barrier paper backing if so specified. The weight of the paper adds to the overall weight of the sheet of lath.

Permissible Variations - inches

1. Thickness: $\pm 1/64$ inch
2. Width: $\pm 3/16$ inch
3. Length: -0 +1 inch
4. Weight: $\pm 10\%$

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 finish steel sheet that is further processed forming the diamond shaped pattern.

KRAFT PAPER BACKING FOR SPRAY LATH

The Kraft paper backing is factory applied between the ribs to conserve the machine applied stucco and to allow visual location of the framing members.

PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided.

AMICO LATH AND STUCCO ACCESSORIES MEETS THE FOLLOWING SPECIFICATIONS

ASTM C847 - Standard Specification for Expanded Metal Lath

ASTM A653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process Meets Buy American Procurement Requirements.

Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION


3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

August 2011

email fmayer@gibraltar1.com



TILATH FLAT EXPANDED METAL 2.5 lbs / sq yd LATH WITH GRADE D, STYLE 2, FACTORY APPLIED ASPHALT SATURATED PAPER meeting ASTM C847.

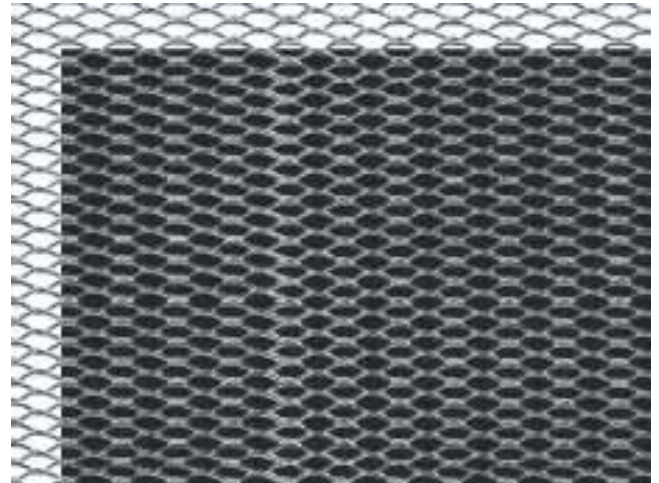

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal diamond lath with paper backing and designed to be used as a base for gypsum or portland cement plaster.

DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS Per ASTM C847

Minimum thickness of expanded metal lath

1. Diamond expanded metal lath: $\frac{1}{8}$ inch

Minimum sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)

Nominal weights of lath (for U.S.) - lbs/yd²

Tilath Flat Expanded Metal Lath weighing 2.5 lbs/yd²

The weights listed above are only for the metal lath and do not take into consideration the weight of the moisture barrier paper backing if so specified. The weight of the paper adds to the overall weight of the sheet of lath.

Permissible Variations - inches

1. Thickness: $\pm 1/64$ inch
2. Width: $\pm 3/16$ inch
3. Length: -0 +1 inch
4. Weight: $\pm 10\%$

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 finish steel sheet that is further processed forming the diamond shaped pattern.

PAPER BACKING FOR LATH

The Grade D paper backing factory applied by the manufacturer provides one of the layers of moisture barrier required by codes and standards. AMICO paper meets ASTM C1063 and Federal Specification UU-B-790a.

PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided. AMICO LATH AND STUCCO ACCESSORIES MEETS THE FOLLOWING SPECIFICATIONS
ASTM C847 - Standard Specification for Expanded Metal Lath
ASTMA653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process
Federal Specification UU-B-790a - Moisture Resistant Building Papers, Type 1, Grade 2, Style 2
Meets Buy American Procurement Requirements.
Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

August 2011

email fmayer@gibraltar1.com



TILATH FLAT EXPANDED METAL 3.4 lbs / sq yd LATH WITH GRADE D, STYLE 2, FACTORY APPLIED ASPHALT SATURATED PAPER meeting ASTM C847.

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal diamond lath with paper backing and designed to be used as a base for gypsum or portland cement plaster.

DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS Per ASTM C847

Minimum thickness of expanded metal lath

1. Diamond expanded metal lath: $\frac{1}{8}$ inch

Minimum sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)

Nominal weights of lath (for U.S.) - lbs/yd²

Tilath Flat Expanded Metal Lath weighing 3.4 lbs/yd²


The weights listed above are only for the metal lath and do not take into consideration the weight of the moisture barrier paper backing if so specified. The weight of the paper adds to the overall weight of the sheet of lath.sheet.

Permissible Variations - inches

1. Thickness: $\pm 1/64$ inch
2. Width: $\pm 3/16$ inch
3. Length: -0 +1 inch
4. Weight: $\pm 10\%$

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 finish steel sheet that is further processed forming the diamond shaped pattern.

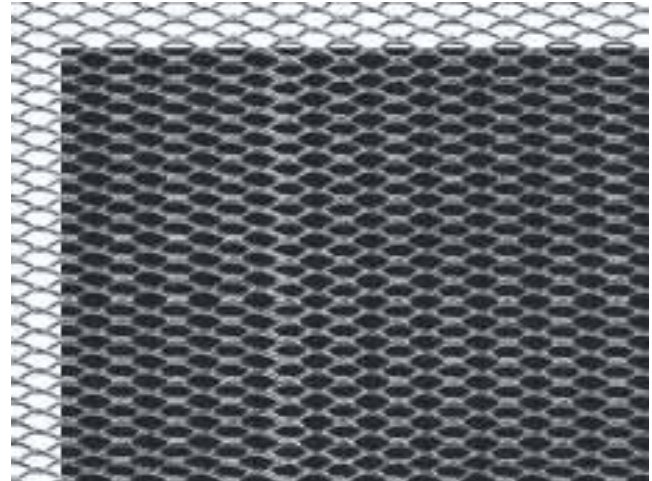

PAPER BACKING FOR LATH

The Grade D paper backing factory applied by the manufacturer provides one of the layers of moisture barrier required by codes and standards. AMICO paper meets ASTM C1063 and Federal Specification UU-B-790a.

PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided.

**AMICO LATH AND STUCCO ACCESSORIES
MEETS THE FOLLOWING SPECIFICATIONS**

ASTM C847 - Standard Specification for Expanded Metal Lath

ASTMA653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process

Federal Specification UU-B-790a - Moisture Resistant Building Papers, Type 1, Grade 2, Style 2

Meets Buy American Procurement Requirements.

Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

August 2011

email fmayer@gibraltar1.com



TILATH PAPER BACKED DIMPLED SELF-FURRED LATH 2.5 lbs / sqyd

**WITH GRADE D, STYLE 2, ASPHALT SATURATED
PAPER IS FACTORY APPLIED
meeting ASTM C847.**

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal diamond lath and self-furred lath, with or without paper backing and designed to be used as a base for gypsum or portland cement plaster.

DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS Per ASTM C847

Minimum thickness of expanded metal lath

1. Self-furred expanded metal lath: $\frac{5}{16}$ inch

Minimum sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)

Nominal weights of lath (for U.S.) - lbs/yd² Tilath Paper Backed and Dimpled Expanded Metal Lath weighing 2.5 lbs/yd²

The weights listed above are only for the metal lath and do not take into consideration the weight of the moisture barrier paper backing if so specified. The weight of the paper adds to the overall weight of the sheet of lath.

Permissible Variations - inches

1. Thickness: $\pm \frac{1}{64}$ inch
2. Width: $\pm \frac{3}{16}$ inch
3. Length: -0 +1 inch
4. Weight: $\pm 10\%$

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 finish steel sheet that is further processed forming the diamond shaped pattern.



PAPER BACKING FOR LATH

The Grade D paper backing factory applied by the manufacturer provides one of the layers of moisture barrier required by codes and standards. AMICO paper meets ASTM C1063 and Federal Specification UU-B-790a.

PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided.

**AMICO LATH AND STUCCO ACCESSORIES
MEETS THE FOLLOWING SPECIFICATIONS**

ASTM C847 - Standard Specification for Expanded Metal Lath

ASTM A653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process

Federal Specification UU-B-790a - Moisture Resistant Building Papers, Type 1, Grade 2, Style 2

Meets Buy American Procurement Requirements.

Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

August 2011

email fmayer@gibraltar1.com



TILATH PAPER BACKED DIMPLED SELF-FURRED LATH 3.4 lbs / sqyd

**WITH GRADE D, STYLE 2, ASPHALT SATURATED
PAPER IS FACTORY APPLIED
meeting ASTM C847.**

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal diamond lath and self-furred lath, with or without paper backing and designed to be used as a base for gypsum or portland cement plaster.

DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS Per ASTM C847

Minimum thickness of expanded metal lath

1. Self-furred expanded metal lath: $\frac{5}{16}$ inch

Minimum sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)

Nominal weights of lath (for U.S.) - lbs/yd²
Tilath Paper Backed and Dimpled Expanded
Metal Lath weighing 3.4 lbs/yd²


The weights listed above are only for the metal lath and do not take into consideration the weight of the moisture barrier paper backing if so specified. The weight of the paper adds to the overall weight of the sheet of lath.

Permissible Variations - inches

1. Thickness: $\pm 1/64$ inch
2. Width: $\pm 3/16$ inch
3. Length: -0 +1 inch
4. Weight: $\pm 10\%$

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 finish steel sheet that is further processed forming the diamond shaped pattern.

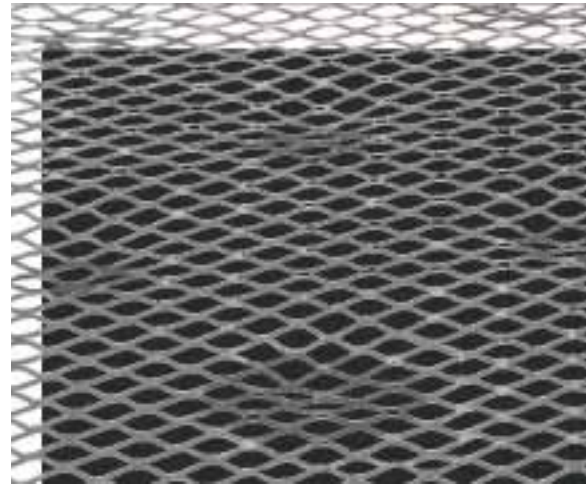

PAPER BACKING FOR LATH

The Grade D paper backing factory applied by the manufacturer provides one of the layers of moisture barrier required by codes and standards. AMICO paper meets ASTM C1063 and Federal Specification UU-B-790a.

PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided.

**AMICO LATH AND STUCCO ACCESSORIES
MEETS THE FOLLOWING SPECIFICATIONS**

ASTM C847 - Standard Specification for Expanded Metal Lath

ASTM A653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process

Federal Specification UU-B-790a - Moisture Resistant Building Papers, Type 1, Grade 2, Style 2

Meets Buy American Procurement Requirements.

Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

August 2011

email fmayer@gibraltar1.com



TILATH PAPER BACKED V-GROOVED 2.5 lbs / sqyd SELF-FURRED EXPANDED METAL LATH

WITH GRADE D, STYLE 2, ASPHALT SATURATED
PAPER IS FACTORY APPLIED
meeting ASTM C847.

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal diamond self-furred lath, with paper backing and designed to be used as a base for gypsum or portland cement plaster.

DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS Per ASTM C847

Minimum thickness of expanded metal lath

1. Self-furred expanded metal lath: $\frac{5}{16}$ inch

Minimum sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)

Nominal weights of lath (for U.S.) - lbs/yd²

Tilath Paper Backed and V-Grooved Expanded Metal
Lath weighing 2.5 lbs/yd²


The weights listed above are only for the metal lath and do not take into consideration the weight of the moisture barrier paper backing if so specified. The weight of the paper adds to the overall weight of the sheet of lath.

Permissible Variations - inches

1. Thickness: $\pm \frac{1}{64}$ inch
2. Width: $\pm \frac{3}{16}$ inch
3. Length: -0 +1 inch
4. Weight: $\pm 10\%$

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 finish steel sheet that is further processed forming the diamond shaped pattern.

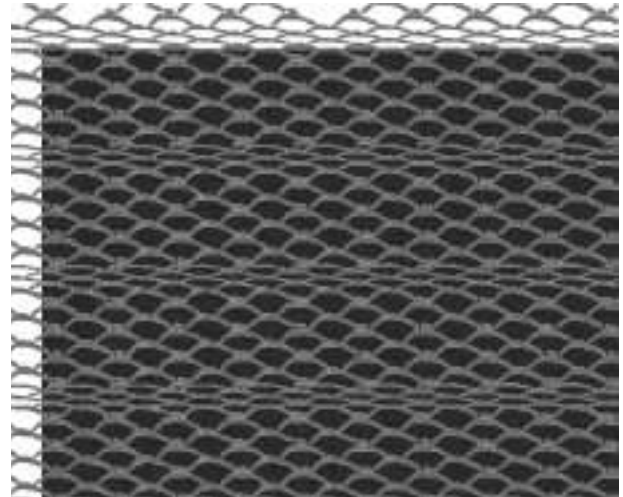

PAPER BACKING FOR LATH

The Grade D paper backing factory applied by the manufacturer provides one of the layers of moisture barrier required by codes and standards. AMICO paper meets ASTM C1063 and Federal Specification UU-B-790a.

PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided.

AMICO LATH AND STUCCO ACCESSORIES
MEETS THE FOLLOWING SPECIFICATIONS

ASTM C847 - Standard Specification for Expanded Metal Lath

ASTM A653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process

Federal Specification UU-B-790a - Moisture Resistant Building Papers, Type 1, Grade 2, Style 2

Meets Buy American Procurement Requirements.

Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

August 2011

email fmayer@gibraltar1.com



TILATH PAPER BACKED V-GROOVED 3.4 lbs / sqyd SELF-FURRED EXPANDED METAL LATH

WITH GRADE D, STYLE 2, ASPHALT SATURATED
PAPER IS FACTORY APPLIED
meeting ASTM C847.

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal diamond self-furred lath, with paper backing and designed to be used as a base for gypsum or portland cement plaster.

DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS Per ASTM C847

Minimum thickness of expanded metal lath

1. Self-furred expanded metal lath: $\frac{5}{16}$ inch

Minimum sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)

Nominal weights of lath (for U.S.) - lbs/yd²

Tilath Paper Backed and V-Grooved Expanded Metal
Lath weighing 3.4 lbs/yd²


The weights listed above are only for the metal lath and do not take into consideration the weight of the moisture barrier paper backing if so specified. The weight of the paper adds to the overall weight of the sheet of lath.

Permissible Variations - inches

1. Thickness: $\pm 1/64$ inch
2. Width: $\pm 3/16$ inch
3. Length: -0 +1 inch
4. Weight: $\pm 10\%$

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 finish steel sheet that is further processed forming the diamond shaped pattern.

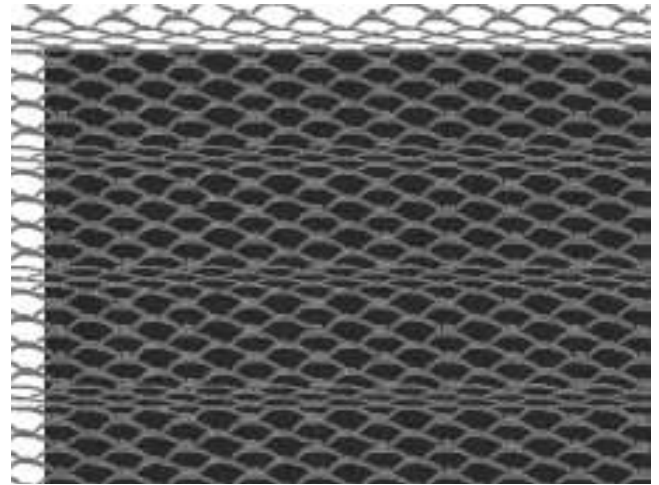

PAPER BACKING FOR LATH

The Grade D paper backing factory applied by the manufacturer provides one of the layers of moisture barrier required by codes and standards. AMICO paper meets ASTM C1063 and Federal Specification UU-B-790a.

PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided.

AMICO LATH AND STUCCO ACCESSORIES
MEETS THE FOLLOWING SPECIFICATIONS

ASTM C847 - Standard Specification for Expanded
Metal Lath

ASTM A653 - Standard Specification for Steel Sheet,
Zinc-Coated (Galvanized) by the hot-dip process

Federal Specification UU-B-790a - Moisture Resistant
Building Papers, Type 1, Grade 2, Style 2

Meets Buy American Procurement Requirements.

Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

August 2011

email fmayer@gibraltar1.com



TILATH PAPER BACKED FLAT 1/8" RIB 2.75 lbs / sqyd EXPANDED METAL LATH

WITH GRADE D, STYLE 2, ASPHALT SATURATED
PAPER IS FACTORY APPLIED
meeting ASTM C847.

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal diamond lath and self-furred lath, with paper backing and designed to be used as a base for gypsum or portland cement plaster.

DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS Per ASTM C847

Minimum thickness of expanded metal lath

1. Flat Rib expanded metal lath: 1/8 inch

Minimum sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)

Nominal weight of lath (for U.S.) - lbs/yd

Tilath Paper Backed 1/8" Flat Rib Expanded Metal Lath
weighing 2.75 lbs/yd²


The weights listed above are only for the metal lath and do not take into consideration the weight of the moisture barrier paper backing if so specified. The weight of the paper adds to the overall weight of the sheet of lath.

Permissible Variations - inches

1. Thickness: ± 1/64 inch
2. Width: ± 3/16 inch
3. Length: -0 +1 inch
4. Weight: ± 10%

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 finish steel sheet that is further processed forming the diamond shaped pattern.

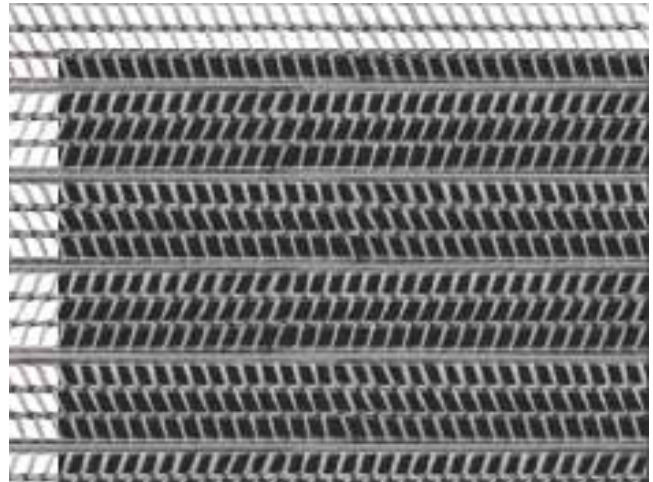

PAPER BACKING FOR LATH

The Grade D paper backing factory applied by the manufacturer provides one of the layers of moisture barrier required by codes and standards. AMICO paper meets ASTM C1063 and Federal Specification UU-B-790a.

PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided.

**AMICO LATH AND STUCCO ACCESSORIES
MEETS THE FOLLOWING SPECIFICATIONS**
ASTM C847 - Standard Specification for Expanded Metal Lath

ASTM A653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process
Federal Specification UU-B-790a - Moisture Resistant Building Papers, Type 1, Grade 2, Style 2

Meets Buy American Procurement Requirements.

Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

August 2011

email fmayer@gibraltar1.com



TILATH PAPER BACKED FLAT 1/8" RIB 3.4 lbs / sqyd EXPANDED METAL LATH

**WITH GRADE D, STYLE 2, ASPHALT SATURATED
PAPER IS FACTORY APPLIED
meeting ASTM C847.**

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal diamond lath and self-furred lath, with or without paper backing and designed to be used as a base for gypsum or portland cement plaster.

DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS Per ASTM C847

Minimum thickness of expanded metal lath

1. Flat Rib expanded metal lath: 1/8 inch

Minimum sheet dimensions - inches

1. All styles - Length of Sheet: 97 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)

Nominal weight of lath (for U.S.) - lbs/yd

Tilath Paper Backed 1/8" Flat Rib Expanded Metal Lath
weighing 3.4 lbs/yd²


The weights listed above are only for the metal lath and do not take into consideration the weight of the moisture barrier paper backing if so specified. The weight of the paper adds to the overall weight of the sheet of lath.

Permissible Variations - inches

1. Thickness: ± 1/64 inch
2. Width: ± 3/16 inch
3. Length: -0 +1 inch
4. Weight: ± 10%

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 finish steel sheet that is further processed forming the diamond shaped pattern.

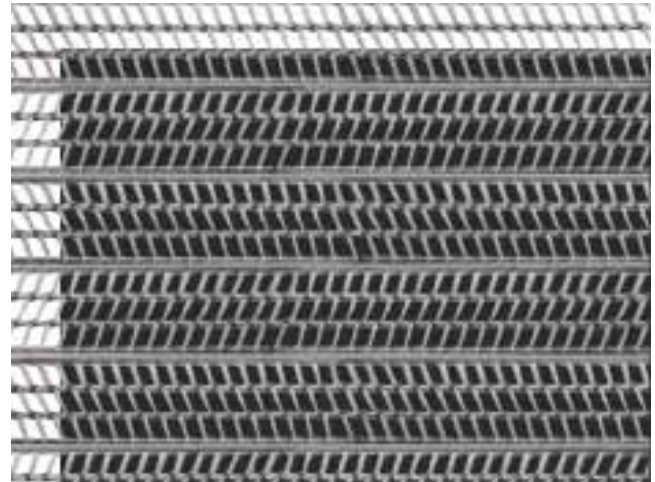

PAPER BACKING FOR LATH

The Grade D paper backing factory applied by the manufacturer provides one of the layers of moisture barrier required by codes and standards. AMICO paper meets ASTM C1063 and Federal Specification UU-B-790a.

PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided.

**AMICO LATH AND STUCCO ACCESSORIES
MEETS THE FOLLOWING SPECIFICATIONS**

ASTM C847 - Standard Specification for Expanded Metal Lath

ASTM A653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process

Federal Specification UU-B-790a - Moisture Resistant Building Papers, Type 1, Grade 2, Style 2

Meets Buy American Procurement Requirements.

Made in the United States of America

ICC-ESR 2247

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

August 2011

email fmayer@gibraltar1.com

